
BULLED GER

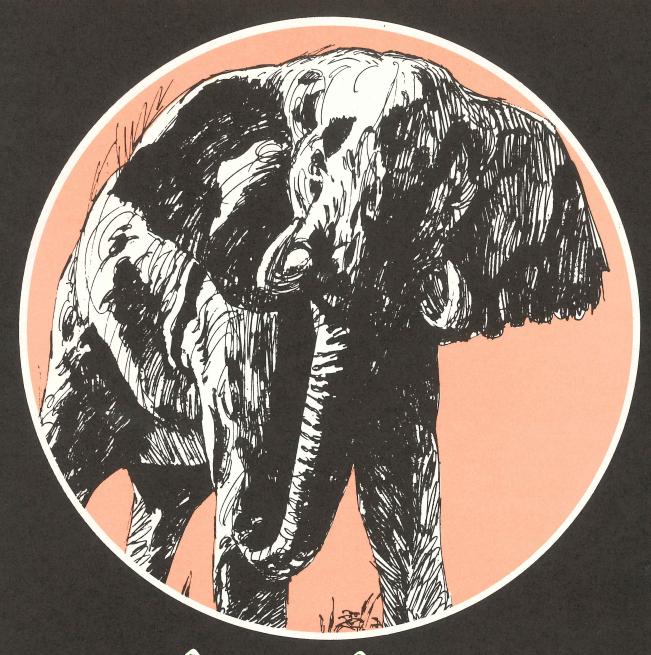

by Collins

BULLIDGER

by Cockeons

HEAVY DUTY

- Double Bank Saws
- Hinge Mounted Saw
- Designed to Handle F
- All-Steel Rectangular
- 1/2" Steel Plate Side

2 - Bank Gang Saw For 2 - Size Sawing At Any Time

Manual Lift Standard On Pressure Rolls

3-SAW EDGER

8 INCH GANG SIDE

3 - Saw Edger1 Stationary, 2 MoveableLever Operated

Solid Steel Infeed Rolls Cross Feed Chain and Adjustable Straight Edge

Hinge Mounted Saw Loading Door Permits Easy Access to Gang Saws Tapered End on Saw Arbor Locks _oading Door Securely to Bearing Mounted Sleeve rozen Hardwood Tube Frame **Unique Inside Features** Panels **Prevent Cant Vibration** While Sawing All Mechanical - No **Complicated Air or Electric Circuits Makes It Trouble-Free**

GENERAL SPECIFICATIONS JACKSON DOUBLE BULL EDGER

Model Number	8000	
Size	8' x 3"' x 17' — 0"' x 6' - 8"	
Weight	10,000 lbs. (Approx.)	
Maximum Cut	8"	
Maximum Width Stock	12"	
Minimum Length Stock	72"	
Minimum H.P. Required	100	
MAIN FRAME		
Side Plates	½"	
Arbor	215/6"	
Bearings	(4) Roller Type \(\frac{1}{2}'' \times 2\frac{1}{2}'' \)	
Safety Fingers		
Drive Mount	Machine	
PRESSURE ROLL		
	GANG SIDE	EDGER SIDE
No and Size	(2) 6" Solid Steel	(2) 4" Solid Steel
Down Pressure	200 lbs. Per Rolls	130 lbs. Per Roll
Lift	Manual (Optional Hydraulic)	
Shaft Size	13/4	1%
FEED ROLL		
No. and Size	(4) 21/16" Fluted	(2) 21/16" Fluted
Shaft Size	1 3/4	1 3/4
Drive	Electric	
Chain	No. 50 Roller	
Rate of Feed	32 ft. Per Min.	152 Ft. Per Min.
SAW ARRANGEMENT		
No. and Size	(11) 24" I.P. Rift	(3) 18" I.P.
Spacers	Sleeve Mounted	, , , , , , , , , , , , , , , , , , , ,
Collars		6" Cast
INFEED TABLE		
Size and Length	10" Rect. Tube x 5' - 6"	
Rolls and Diameter	(4) 2% Solid Steel	(3) 2% Solid Steel
Shaft Size on Rolls	1:	
Straight Edge	(2) Fixed	(1) Adjustable 0-6"
OUTFEED TABLE		
Size and Length	10" Rect. Tube x 6 - 0"	
Rolls and Diameter (Enclosed)	(3) 2% Live	(3) 27/8 Live
Shaft Size on Rolls	13%	

Come To JACKSON . . . Where Ideas Are in Production

