

by Receive on

BULLEDGER

by College


2 - Bank Gang Saw For 2 - Size Sawing At Any Time


Manual Lift Standard On Pressure Rolls

HEAVY DUTY

- Double Bank Saws
- Hinge Mounted Saw Loading Door
- Designed to Handle Frozen Hardwood
- All-Steel Rectangular Tube Frame
- 1/2" Steel Plate Side Panels

3-SAW EDGER





Hinge Mounted
Saw Loading Door
Permits Easy Access
to Gang Saws

Tapered End on Saw Arbor Locks Securely to Bearing Mounted Sleeve


Unique Inside Features
Prevent Cant Vibration
While Sawing

All Mechanical - No Complicated Air or Electric Circuits Makes It Trouble-Free

8 INCH GANG SIDE

3 - Saw Edger 1 Stationary, 2 Moveable Lever Operated

Solid Steel Infeed Rolls Cross Feed Chain and Adjustable Straight Edge

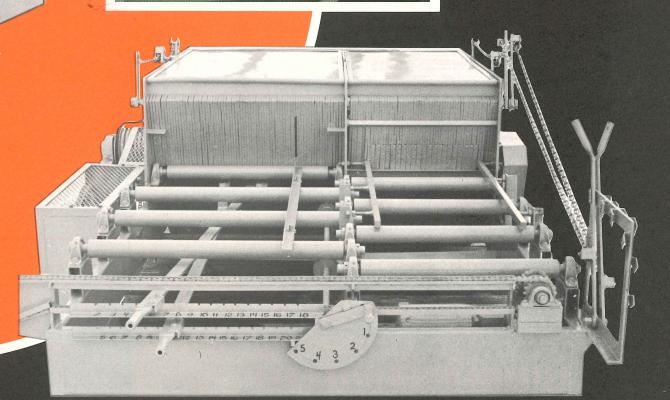

GENERAL SPECIFICATIONS JACKSON DOUBLE BULL EDGER

Model Number	8000	
Size	8' x 3" x 17' - 0" x 6' - 8"	
Weight	10,000 lbs. (Approx.)	
Maximum Cut	8"	
Maximum Width Stock	12"	
Minimum Length Stock	72"	
Minimum H.P. Required	100	
MAIN FRAME		
Side Plates	1/2"	
Arbor	215/6"	
Bearings	(4) Roller Type	
Safety Fingers	1/2" × 21/2"	
Drive Mount	Machine	
PRESSURE ROLL		
	GANG SIDE	EDGER SIDE
No and Size	(2) 6" Solid Steel	(2) 4" Solid Steel
Down Pressure	200 lbs. Per Rolls	130 lbs. Per Roll
Lift	Manual (Optional Hydraulic)	
Shaft Size	13/4	13/8
FEED ROLL		
No. and Size	(4) 27/6" Fluted	(2) 2½" Fluted
Shaft Size	13/4	13/4
Drive	Electric	
Chain	No. 50 Roller	
Rate of Feed	32 ft. Per Min.	152 Ft. Per Min.
SAW ARRANGEMENT		
No. and Size	(11) 24" I.P. Rift	(3) 18" I.P.
Spacers	Sleeve Mounted	(0, 10, 111)
Collars		6" Cast
INFEED TABLE		
Size and Length 10" Rect. Tube x 5' - 6"		
Rolls and Diameter	(4) 2% Solid Steel	(3) 2% Solid Steel
Shaft Size on Rolls	(4) 278 Solid Sieci	L
Straight Edge	(2) Fixed	(1) Adjustable 0-6"
OUTFEED TABLE		
Size and Length	10" Rect. Tube x 6 - 0"	
Rolls and Diameter (Enclosed)	(3) 2% Live	(3) 27/8 Live
Shaft Size on Rolls	(5) 2/8 LIVE	
178		

Come To JACKSON . . .Where Ideas Are in Production

